


FX-PF09LA

Features & Benefits

PRODUCT STRUCTURE

- PET high permeability protective film
- Selfrepair self-repairing nano coating technology SELF-HEALING COATING
- High performance polycaprolactone type aliphatic TPU
- PSA Glue
- Double matte release film

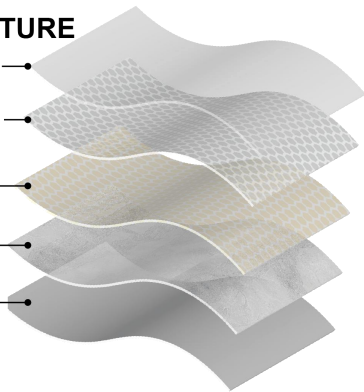

Self-Healing Coating



Excellent optical clarity



Excellent stretchability



Anti-yellowing property



Superior hydrophobic property



High and low temperature resistant



No cracks after stretching



Easy for installation curved surfaces

Category	Value	Category	Value
Thickness	8.5mil/210μm	Raw Materials	Lubrizol
60° Surface Gloss	95 GU	Hydrophobic Angle	105°
Elongation at Break(ASTMD-882)	430%	Tensi strength (ASTMD-882)	26Mpa
Aging Resistance (UV Test:3000H)	Pass	Chemical Resistance (Acid Test)	Pass
Healing Performance	Self-Healing Coating	Impact Test (SAE J400)	Pass
Peel force (GB/T 2792-2014)	20min: ≥1700gf/inch 24hr: ≥2650gf/inch	Stain Resistance	★★★★★
Warranty	10 Years	Size	1.52*15m

Product usage suggestions :

1. Before construction, the paint surface must be cleaned of grease or foreignmatter;
2. When wrapping the edges, clean the shower gel on the rubber surface with water, then wait for the water to dry and evaporate, and use a hot gun to wrap the edges to prevent the edges from warping later;
3. In locations with relatively large curvature, it is recommended to pour hot water at 30~50°C on the surface of the film to soften the film for easier installation.